

"EXPRESS MAIL" COVER LETTER

jc760 U.S. PTO



10/02/00

10-03-00

A

Date: October 2, 2000

Commissioner of Patents and Trademarks
Box: Patent Application
Washington, DC 20231

jc882 U.S. PTO
09/678183
10/02/00


Re: Application for United States Letters Patent
APPLICANT: Daniel A. Schoch
TITLE OF INVENTION: DISPLACEMENT BASED DYNAMIC LOAD MONITOR

Sir:

Forwarded herewith is the above-identified application, consisting of the following:

Fee Transmittal Letter
Specification (20 Sheets)
Claims (12 Sheets)
Abstract
Drawings (5 Sheets)
Unexecuted Declaration
Information Disclosure Statement
Form PTO-1449
Cited Art References

Respectfully submitted,


Randall J. Knuth
Registration No. 34,644

RJK/jrc

Enclosures: As stated above.
Check No. 4633 (\$1298.00)
Return Postcard


RANDALL J. KNUTH, P.C.
3510-A STELLHORN ROAD
FORT WAYNE, IN 46815-4631
TELEPHONE: 219-485-6001
FACSIMILE: 219-486-2794

"EXPRESS MAIL" Mailing Number EL161763171US
Date of Deposit October 2, 2000.

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, DC 20231

Randall J. Knuth, Registration No. 34,644

(Typed Name of Person Mailing Paper or Fee)

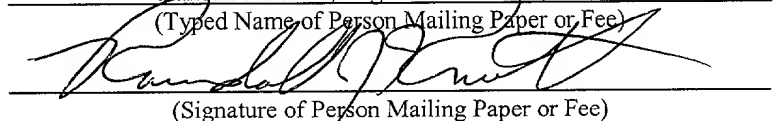
(Signature of Person Mailing Paper or Fee)

Date: October 2, 2000

Attorney Docket No. M-193

Honorable Commissioner of Patents and Trademarks
Box: Patent Application
Washington, DC 20231

Sir:

Transmitted herewith for filing is the patent application of:

Inventor: Daniel A. Schoch

For: DISPLACEMENT BASED DYNAMIC LOAD MONITOR

Enclosed are:

- [X] Five (5) Sheets of Drawings.
- [] An assignment of the invention to _____.
- [] A certified copy of a _____ application.
- [] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- [X] Other Unexecuted Declaration, Information Disclosure Statement, PTO-1449 and Cited Art.


The filing fee has been calculated as follows:

Column 1		Column 2			
FOR	FILED	EXTRA	RATE	FEE	
BASIC FEE				\$710.00	
*TOTAL CLAIMS	26 - 20 =	6	x \$ 18 00 =	\$108.00	
*INDEPENDENT CLAIMS	06 - 03 =	6	x \$ 80 00 =	\$480 00	
MULTIPLE DEPENDENT CLAIMS			+ \$270.00 =	\$0.00	
*NOTE: If the difference in Column 1 is less than zero, enter "0" in Column 2			TOTAL OF ABOVE CALCULATIONS	\$1,298.00	
Reduction of 1/4 for filing by small entity, if applicable. A small entity statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28)				\$0.00	
TOTAL				\$1,298.00	
Assignment Recording Fee (\$40)				\$0 00	
Non-English Specification Fee (\$130)				\$0.00	
Total Enclosed				\$1,298 00	

[X] A check in the amount of \$ 1298 00 to cover the filing fee is enclosed (Check No. 4633.)

[X] The Commissioner is hereby authorized to charge any additional fees which may be required and credit any overpayments to RANDALL J. KNUTH, P.C. - Account Number 501157

Respectfully submitted,

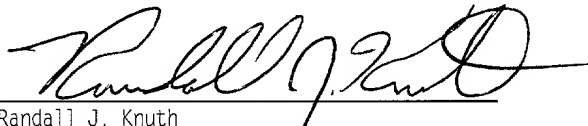
Randall J. Knuth
Registration No. 34,644

RJK/jrc

RANDALL J. KNUTH, P.C.
3510-A Stellinghorn Road
Fort Wayne, IN 46815-4631
Telephone: 219/485-6001
Facsimile: 219/486-2794

DISPLACEMENT BASED DYNAMIC LOAD MONITOR

BACKGROUND OF THE INVENTION

1. Field of the invention.

The present invention relates generally to an apparatus and method for monitoring press force severity and press load.

Specifically, the present invention relates to a method and apparatus for monitoring dynamic press load without the use of a contact force sensor.

2. Description of the related art.

Mechanical presses of the type performing stamping and drawing operations employ a conventional construction which includes a frame structure having a crown and a bed and which supports a slide in a manner enabling reciprocating movement toward and away from the bed. These press machines are widely used for a variety of workpiece operations employing a large selection of die sets with the press machine varying considerably in size and available tonnage depending upon its intended use.

A press applies force to a workpiece so that the workpiece (i.e. stock material) acquires the desired geometry corresponding to the die set being utilized. Systems for monitoring press operating reliability assist the press owner in evaluating the impact of certain die/load applications on the reliability of the press being monitored. Conventional monitoring systems include

systems which utilize contact load sensors to monitor the peak load being developed within certain components of the press machine during a slide stroke of the press. Known methods of monitoring peak loads utilize an electrical resistance or piezoresistive strain gage or other transducer which is mounted on the press and which voltage change due to resistive change indirectly measures a value of applied load. Monitoring load exerted on load bearing members during a slide stroke of a mechanical press allows press and die applications to be adjusted when monitored peak load values are outside an acceptable range.

What is needed in the art is an apparatus and method to compute the load on a press without utilizing a contacting load sensor.

SUMMARY OF THE INVENTION

The present invention provides a method and apparatus for the identification of dynamic load on a mechanical press which does not require a contact load sensor.

More specifically, the method and apparatus of the present invention continually computes a theoretical no load slide displacement curve while also creating an actual slide displacement curve during a load condition of the mechanical press. The apparatus and method of the current invention then employs a curve matching technique to superimpose these two curves so that values of dynamic deflection at different points

in the slide path may be computed. Values of dynamic deflection are then utilized in conjunction with a constant corresponding to the static stiffness of the press to calculate load on the press.

The invention, in one form thereof, comprises a method of generating a theoretical slide displacement curve for a mechanical press. This method includes the steps of: providing an equation that can be utilized to calculate slide displacement as a function of press speed and which includes variables to account for press parameters which effect slide displacement; providing a computational device; determining the speed of the press; determining the aforementioned equation variables; communicating the equation, the speed of the press and the equation variables to the computational device; calculating the theoretical distance above bottom dead center for each increment of a slide stroke; and plotting the calculated distance above bottom dead center values vs. time. The step of determining the equation variables can further include the steps of: determining the appropriate variable corresponding to the press drive mechanism of the mechanical press, determining the appropriate variable corresponding to the connecting rod length of the mechanical press, determining the appropriate variable corresponding to the stroke length of the mechanical press, and determining the appropriate variable corresponding to the bearing size of the mechanical press.

The invention, in another form thereof, comprises a speed sensor for sensing a value of press speed, input means for inputting a plurality of variables corresponding to characteristics of the monitored press, computer storage means for storing an equation which can be used for generating the theoretical slide displacement curve, and a computer processor means for generating the theoretical slide displacement curve. In this form of the invention, the computer processor means are communicatively connected to the sensor means, the input means and the storage means. The equation utilizes the plurality of variables corresponding to characteristics of the press and the value of press speed to generate the theoretical slide displacement curve. The plurality of variables input via the input means can include a value of connecting rod length, a value of stroke length, a value of drive type, and a value of bearing size.

The invention, in another form thereof, comprises a method of monitoring performance parameters for a mechanical or hydraulic press. This method includes the steps of: generating a theoretical no load slide displacement curve, generating an actual slide displacement curve during a load condition of the press, determining the contact point on the actual slide displacement curve which corresponds to the slide contacting the stock material, establishing a start point on the slide

downstroke between top dead center and the contact point,
establishing an end point on the slide upstroke between top dead
center and the contact point, identifying the points on the
theoretical slide displacement curve corresponding to the start
point and the end point, identifying the points on the actual
slide displacement curve corresponding to the start point and the
end point, superimposing the identified start points on the
theoretical and actual slide displacement curves, and
superimposing the identified end points on the theoretical and
actual slide displacement curves. In this form of the invention,
the step of generating a theoretical no load slide displacement
curve may further comprise the steps of: providing an equation
that can be utilized to calculate slide displacement as a
function of press speed which equation includes variables
corresponding to press drive mechanism, connecting rod length,
stroke length and bearing size; determining the speed of the
press; determining the appropriate variable corresponding to the
press drive mechanism of the mechanical press; determining the
appropriate variable corresponding to the connecting rod length
of the mechanical press; determining the appropriate variable
corresponding to the stroke length of the mechanical press;
determining the appropriate variable corresponding to the bearing
size of the press; providing a computational device;
communicating the equation, the speed of the press and the

equation variables to the computational device; calculating the theoretical distance above bottom dead center for each time increment of a slide stroke; and plotting the calculated distance above bottom dead center values for each time increment vs. time.

5 The step of generating an actual slide displacement curve during a load condition of the press can be accomplished by monitoring the displacement of the slide of the press with either a contact or a non-contact displacement sensor and plotting the monitored slide displacement vs. crank angle or time. A first inflection point corresponds to the point at which the slide contacts the stock material (i.e. the contact point).

10 The invention, in another form thereof, comprises a method of monitoring performance parameters for a mechanical press. This method includes the steps of: generating a theoretical no load slide displacement curve, generating an actual slide displacement curve during a load condition of the press, determining the contact point on the actual slide displacement curve which corresponds to the slide contacting the stock material, establishing a start point on the slide downstroke between top dead center and the contact point, establishing an end point on the slide upstroke between top dead center and the contact point, identifying the points on the theoretical slide displacement curve corresponding to the start point and the end point, identifying the points on the actual slide displacement

curve corresponding to the start point and the end point,
superimposing the identified start points on the theoretical and
actual slide displacement curves, and superimposing the
identified end points on the theoretical and actual slide
displacement curves. In this form of the invention, the method
of monitoring performance parameters for a mechanical press
further comprises the steps of: calculating the distance between
the theoretical slide displacement curve and the actual slide
displacement curve at a plurality of increments on the slide
upstroke between the contact point and the end point, calculating
the sum of the distances between the theoretical slide
displacement curve and the actual slide displacement curve at
each increment, shifting the actual slide displacement curve,
calculating the sum of the distances between the theoretical
slide displacement curve and the actual slide displacement curve
at each increment, and repeating the shifting and calculating
steps until the sum of the distances between the theoretical
slide displacement curve and the actual slide displacement curve
at each increment reaches a minimum value.

The invention, in another form thereof, comprises a method
of monitoring performance parameters for a mechanical press.
This method includes the steps of: generating a theoretical no
load slide displacement curve, generating an actual slide
displacement curve during a load condition of the press,

determining the contact point on the actual slide displacement curve which corresponds to the slide contacting the stock material, establishing a start point on the slide downstroke between top dead center and the contact point, establishing an end point on the slide upstroke between top dead center and the contact point, identifying the points on the theoretical slide displacement curve corresponding to the start point and the end point, identifying the points on the actual slide displacement curve corresponding to the start point and the end point, superimposing the identified start points on the theoretical and actual slide displacement curves, and superimposing the identified end points on the theoretical and actual slide displacement curves. In this form of the invention, the method of monitoring performance parameters for a mechanical press further comprises the steps of: determining a value of dynamic deflection, determining the value of static stiffness for the press being monitored, providing a computational device, communicating the value of dynamic deflection and the value of static stiffness to the computational device, and calculating load on the press at any point in time by multiplying the value of dynamic deflection by the value of static stiffness. The step of determining a value of dynamic deflection includes measuring the distance along the ordinate between the theoretical no load slide displacement curve and the actual slide displacement curve

to determine a difference in displacement between these two curves. After a value of dynamic deflection is determined, this value of dynamic deflection may be utilized to calculate load on the press for any time increment of a slide stroke. The
5 calculated load for individual time increments may then be plotted vs. time to establish a load curve for an entire pressing cycle of the press.

The invention, in another form thereof, comprises a method of monitoring load on a mechanical press without using a contact
10 load sensor. This method includes the steps of: determining a value of dynamic deflection, determining the value of static stiffness for the press being monitored, providing a computational device, communicating the value of dynamic
15 deflection and the value of static stiffness to the computational device, and calculating load on the press at any point in time by multiplying the value of dynamic deflection by the value of static stiffness. The step of determining a value of dynamic deflection can further include the steps of: generating a theoretical no load value of slide displacement, generating an
20 actual load value of slide displacement corresponding to the theoretical no load value of slide displacement, computing the difference between the theoretical no load value and the actual load value of slide displacement, and establishing the difference

between the theoretical no load value and the actual load value of slide displacement as the value of dynamic deflection.

The invention, in another form thereof, comprises a method of monitoring load on a mechanical press without using a contact load sensor. This method includes the steps of: determining a value of dynamic deflection, determining the value of static stiffness for the press being monitored, providing a computational device, communicating the value of dynamic deflection and the value of static stiffness to the computational device, and calculating load on the press at any point in time by multiplying the value of dynamic deflection by the value of static stiffness. The method of monitoring load on a mechanical press without using a contact load sensor in this embodiment of the current invention further comprises the steps of: determining a plurality of values of dynamic deflection at increments of the entire slide stroke, calculating a plurality of load values corresponding to the plurality of dynamic deflection values, and generating a plot of load vs. time for a slide stroke of the press.

The invention, in another form thereof, comprises a speed sensor for sensing a value of press speed, input means for inputting a plurality of variables corresponding to characteristics of the press, storage means for storing an equation which can be used for generating a theoretical slide

displacement curve, a computational device for generating a theoretical slide displacement curve, and a non-contact displacement sensor for sensing slide displacement during an actual load condition of the press. The equation stored in the storage means utilizes a plurality of variables corresponding to characteristics of the press and the value of press speed sensed by the sensor means to generate a theoretical slide displacement curve. The computational device is communicatively connected to the sensor means, the input means and the storage means so that the computational device may utilize the equation and its variables to generate a theoretical slide displacement curve. The computational device may further be utilized to plot sensed slide displacement from the non-contact displacement sensor vs. a count quantity. The computational device may further be utilized to match an actual load slide displacement curve generated by plotting the output of the non-contact displacement sensor for a slide stroke to the theoretical slide displacement curve. In an effort to match the theoretical slide displacement curve and the actual applied load displacement curve, the computational device can be utilized to determine the contact point on the actual slide displacement curve which corresponds to the slide contacting the stock material. The computational device may further be utilized to establish a start point and an end point on the slide downstroke between top dead center and the contact

point and the slide upstroke between top dead center and the contact point, respectively. The computational device may then be utilized to identify the start point and the end point on both the theoretical slide displacement curve and on the actual slide displacement curve and to superimpose the identified start points and end points so that the theoretical and actual slide displacement curves can be compared to obtain indicators of press performance. In this form of the invention, the computational device may be, for example, a microprocessor. The count quantity against which the slide displacement is plotted can be, for example, a measure of time or crank angle.

The invention, in another form thereof, comprises a speed sensor for sensing the speed of a mechanical press, a non-contact displacement sensor for sensing slide displacement during an actual load condition of the press, input means for inputting a plurality of variables corresponding to characteristics of the press, and a computational device for computing a value of load on the press at any point of the slide stroke. The computational device is communicatively connected to the speed sensor, the non-contact displacement sensor and the input means. The computational device is utilized to compute a theoretical no load value of slide displacement and to compute a value of dynamic deflection by computing the difference between the theoretical no load value and the corresponding actual load value of slide

displacement sensed during an actual load condition of the press. The computational device then multiplies the thusly determined value of dynamic deflection by the value of static stiffness for the mechanical press to determine a value of load on the press at a point of the slide stroke. The input means may be utilized for inputting variables including: a value of static stiffness corresponding to the press being monitored; an equation for generating theoretical slide displacement values which includes variables corresponding to press drive mechanism, connecting rod length, stroke length and bearing size; a value of connecting rod length; a value of stroke length; a value of drive type; and a value of bearing size.

An advantage of the present invention is the ability to accurately match a theoretical no load slide displacement curve for a mechanical press with an actual applied load slide displacement curve for a mechanical press.

Another advantage of the present invention is the ability to compute load on a mechanical press without utilizing a contact load sensor.

A further advantage of the present invention is the ability to graph load as a function of time so that it may be utilized to monitor the operational condition of a mechanical press.

BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other features and advantages of this invention, and the manner of attaining them, will become more apparent and the invention will be better understood by
5 reference to the following description of an embodiment of the invention taken in conjunction with the accompanying drawings, wherein:

Fig. 1 is a schematic representation of an embodiment of the load computing apparatus;

10 Fig. 2 is an elevational view of a typical press which is the subject of load monitoring;

Fig. 3 is a graphical representation of load vs. time measurements for different press applications;

15 Fig. 4 is a graphical representation of an actual slide displacement curve and a theoretical no load slide displacement curve;

Fig. 5A is a graphical representation of a theoretical no load slide displacement curve superimposed with an actual slide displacement curve and a corresponding force curve representing a
20 graph of the load experienced during a slide stroke of a mechanical press; and

Fig. 5B is a graphical representation of a theoretical no load slide displacement curve superimposed with an actual slide displacement curve.

Corresponding reference characters indicate corresponding parts throughout the several views. The exemplification set out herein illustrates one preferred embodiment of the invention, in one form, and such exemplification is not to be construed as
5 limiting the scope of the invention in any manner.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to the drawings and particularly to Fig. 2, there is depicted a typical press 22 having a bed 20 with a bolster 24. Attached vertically to bed 20 are uprights 26 which
10 support crown 28. Above crown 28 and attached thereto is press motor 34. Slide 30 is operatively connected so that during operation, press motor 34 causes slide 30 to reciprocate in rectilinear fashion toward and away from bed 20. Tooling 32 is operatively connected to slide 30. Leg members 50 are formed as
15 an extension of bed 20 and are generally mounted to shop floor 52 by means of shock absorbing pads 54.

Generally, the present invention utilizes a computational device to continually compute a theoretical no load slide displacement curve as well as to continually plot an actual slide
20 displacement curve. The computational device is further used to employ a curve matching technique to match these two curves so that operational parameters of a mechanical press may be determined. Particularly, this information is utilized to compute a value of load on the press.

Fig. 1 illustrates one embodiment of the invention wherein a computational device 12 receives sensed position values from non-contact displacement sensor 14. Non-contact displacement sensor 14 can be, for example, a hall effect sensor. Computational device 12 further receives a value of press speed (spm) from speed sensor 16. Storage means 18 stores an equation which includes variables corresponding to press parameters which effect slide displacement such as possibly including the speed of the press and variables associated with the geometry of the press. Storage means 18 is communicatively connected to computational device 12. Input means 10 are utilized to input press parameters corresponding to the geometry of the press and may additionally be utilized to input the equation for determining a theoretical slide displacement curve. Computational device 12 receives input from input means 10, non-contact displacement sensor 14, speed sensor 16 and storage means 18 and utilizes this information to continually generate, during press operation, a theoretical no load slide displacement curve and an actual slide displacement curve. These two curves are superimposed one on the other so that a comparison between the curves may be made to obtain operational parameters corresponding to the operating state of the press being monitored. Input means 10 may additionally be utilized to input a value of static stiffness corresponding to the press being monitored. Computational device 12 may utilize

this value in conjunction with a value of dynamic deflection to compute load at any point of the slide stroke of the press being monitored.

During press operation, non-contact displacement sensor 14 continually monitors and communicates slide displacement values to computational device 12. Similarly, speed sensor 16 continually monitors and communicates press speed values to computational device 12. Prior to press monitoring, an equation for theoretically calculating slide displacement as a function of press speed is input into storage means 18. Prior to monitoring, input means 10 are utilized to enter press variables corresponding to the geometry of the press as well as a value of static stiffness (K_{static}) which has been empirically determined for the press being monitored.

Computational device 12 continually utilizes speed values derived from speed sensor 16 in conjunction with the equation contained in storage means 18 and the press variables input through input means 10 to generate a theoretical no load slide displacement curve. Fig. 4 depicts such a generated theoretical no load slide displacement curve.

Computational device 12 continually receives slide displacement values from non-contact displacement sensor 14 and plots an actual slide displacement curve. Such an actual slide displacement curve is depicted in Fig. 4. Computational device

12 continually computes both a theoretical slide displacement curve and an actual slide displacement curve during operation of the press being monitored. Computational device 12 then employs a curve matching technique to superimpose these two curves in an effort to obtain operational parameters of the press being monitored.

To match the actual slide displacement curve and the theoretical no load slide displacement curve, computational device 12 first identifies start point 56 and end point 58 on both of these curves. Start point 56 is a point on the downstroke and is chosen as a point on the slide path between contact point 60 (i.e. where the slide contacts the stock material) and top dead center. Similarly, end point 58 is chosen as a point on the slide upstroke between the contact point and top dead center. To superimpose the actual slide displacement curve and the theoretical no load slide displacement curve, computational device 12 matches start points 56 and end points 58. After these two points have been matched, computational device 12 utilizes a fine tuning method which shifts the actual slide displacement curve until the sum of the incremental distances between the actual slide displacement curve and the theoretical no load slide displacement curve above the contact point on the upstroke of the slide are minimized. Fig. 5B illustrates curves matched using this method. In this way, a

value of load on the press may be continually computed during press operation so that a load vs. time curve may be generated.

Fig. 3 graphically depicts four load vs. time curves for different press applications. As depicted in Fig. 3, different press applications may have the same peak compressive load (L1) and yet have very different impulse energy values. The value of utilizing impulse energy as an indicator of press performance is outlined in pending U.S. Provisional Patent Application Serial No., 60/15*9,818 the disclosure of which is herein explicitly incorporated by reference. Since impulse energy provides a reliable indicator of press operating condition, it is advantageous that the current invention can continually compute values of load during press operation. Fig. 5A graphically depicts a superimposed actual slide displacement curve with a theoretical no load slide displacement curve as well as a force vs. slide position curve generated by the method and apparatus of the current invention. Computational device 12 may be communicatively connected to a visual display device, an alert signal, press shutoff signal or a digital storage device which will store historical data for the press being monitored. Computational device 12 may further be connected to a modem or otherwise to a remote source where press operational condition may be usefully communicated.

While this invention has been described as having a preferred design, the present invention can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles.

Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains and which fall within the limits of the appended claims.

WHAT IS CLAIMED IS:

1. A method of generating a theoretical slide displacement curve for a mechanical press, comprising:

providing an equation that can be utilized to calculate slide displacement as a function of press speed, the equation including variables to account for press parameters which effect slide displacement;

providing a computational device;

determining the speed of the press;

determining the equation variables;

communicating the equation, the speed of the press and the equation variables to the computational device;

calculating the theoretical distance above bottom dead center for each increment of a slide stroke; and

plotting the calculated distance above bottom dead center values vs. time.

2. The method of Claim 1, wherein said step of determining the equation variables comprises:

determining the appropriate variable corresponding to the press drive mechanism of the mechanical press;

determining the appropriate variable corresponding to the connecting rod length of the mechanical press;

determining the appropriate variable corresponding to the stroke length of the mechanical press; and

determining the appropriate variable corresponding to
the bearing size of the mechanical press.

3. An apparatus for generating a theoretical slide
displacement curve for a mechanical press, comprising:

a speed sensor for sensing a value of press speed;
input means for inputting a plurality of variables
corresponding to characteristics of the press;

storage means for storing an equation which can be used
for generating the theoretical slide displacement curve, said
equation utilizing said plurality of variables corresponding to
characteristics of the press and said value of press speed to
generate the theoretical slide displacement curve; and

computer processor means for generating the theoretical
slide displacement curve, said computer processor means
communicatively connected to said sensor means, said input means
and said storage means.

4. The data processing system as recited in Claim 3,
wherein said plurality of variables comprises:

a value of connecting rod length;
a value of stroke length;
a value of drive type; and
a value of bearing size.

5. A method of monitoring performance parameters for a
mechanical press, comprising:

generating a theoretical no load slide displacement curve;

5 generating an actual slide displacement curve during a load condition of the press;

determining the contact point on the actual slide displacement curve which corresponds to the slide contacting the stock material;

10 establishing a start point on the slide downstroke between top dead center and the contact point;

establishing an end point on the slide upstroke between top dead center and the contact point;

15 identifying the points on the theoretical slide displacement curve corresponding to the start point and the end point;

identifying the points on the actual slide displacement curve corresponding to the start point and the end point;

20 superimposing the identified start points on the theoretical and actual slide displacement curves; and

superimposing the identified end points on the theoretical and actual slide displacement curves so that the theoretical and actual slide displacement curves can be compared to obtain indicators of press performance.

6. The method of Claim 5, wherein said step of generating a theoretical no load slide displacement curve comprises:

providing an equation that can be utilized to calculate
slide displacement as a function of press speed, the equation
including variables corresponding to press drive mechanism,
connecting rod length, stroke length, and bearing size;

determining the speed of the press;

determining the appropriate variable corresponding to
the press drive mechanism of the mechanical press;

determining the appropriate variable corresponding to
the connecting rod length of the mechanical press;

determining the appropriate variable corresponding to
the stroke length of the mechanical press;

determining the appropriate variable corresponding to
the bearing size of the mechanical press;

providing a computational device;

communicating the equation, the speed of the press and
the equation variables to the computational device;

calculating the theoretical distance above bottom dead
center for each time increment of a slide stroke; and

plotting the calculated distance above bottom dead
center values vs. time.

7. The method of Claim 5, wherein said step of generating
an actual slide displacement curve during a load condition of the
press comprises:

monitoring the displacement of the slide of the press;

5 and

plotting slide displacement vs. crank angle.

8. The method of Claim 5, wherein said step of generating an actual slide displacement curve during a load condition of the press comprises:

monitoring the displacement of the slide of the press;

5 and

plotting slide displacement vs. time.

9. The method of Claim 5, wherein said step of generating an actual slide displacement curve during a load condition of the press comprises:

monitoring the displacement of the slide of the press using a non-contact displacement sensor; and

plotting slide displacement vs. crank angle.

10. The method of Claim 5, wherein said step of generating an actual slide displacement curve during a load condition of the press comprises:

monitoring the displacement of the slide of the press using a non-contact displacement sensor; and

plotting slide displacement vs. time.

11. The method of Claim 5, wherein said step of determining the contact point on the actual slide displacement curve comprises:

determining the first inflection point on the actual
slide displacement curve; and

establishing the contact point on the actual slide
displacement curve as the first inflection point on the actual
slide displacement curve.

12. The method of Claim 5, further comprising:

calculating the distance between the theoretical slide
displacement curve and the actual slide displacement curve at a
plurality of increments on the slide upstroke between the contact
point and the end point;

calculating the sum of the distances between the
theoretical slide displacement curve and the actual slide
displacement curve at each increment;

shifting the actual slide displacement curve;

calculating the sum of the distances between the
theoretical slide displacement curve and the actual slide
displacement curve at each increment; and

repeating the shifting and calculating steps until the
sum of the distances between the theoretical slide displacement
curve and the actual slide displacement curve at each increment
reaches a minimum value.

13. The method of Claim 5, further comprising:

determining a value of dynamic deflection;

determining the value of static stiffness for the press
being monitored;

5 providing a computational device;

communicating the value of dynamic deflection and the
value of static stiffness to the computational device; and

calculating load on the press at any point of the slide
stroke by multiplying the value of dynamic deflection for the
10 relevant point of the slide stroke by the value of static
stiffness.

14. The method of Claim 13, wherein said step of determining
a value of dynamic deflection comprises:

measuring the distance along the ordinate between the
theoretical no load slide displacement curve and the actual slide
displacement curve.

15. The method of Claim 14, further comprising:

calculating load on the press for each time increment
of a slide stroke; and

plotting calculated load vs. time.

16. A method of monitoring load on a mechanical press
without using a contact load sensor, said method comprising:

determining a value of dynamic deflection;

determining the value of static stiffness for the press
5 being monitored;

providing a computational device;

communicating the value of dynamic deflection and the value of static stiffness to the computational device; and

calculating load on the press at any point of the slide stroke by multiplying the value of dynamic deflection for the relevant point of the slide stroke by the value of static stiffness.

17. The method of Claim 16, wherein said step of determining a value of dynamic deflection comprises:

generating a theoretical no load value of slide displacement;

generating a calculated actual load value of slide displacement corresponding in time to the theoretical no load value of slide displacement;

computing the difference between the theoretical no load value and the actual load value of slide displacement; and

establishing the difference between the theoretical no load value and the actual load value of slide displacement as the value of dynamic deflection.

18. The method of Claim 16, further comprising:

determining a plurality of values of dynamic deflection at increments of the entire slide stroke; and

calculating a plurality of load values corresponding to the plurality of dynamic deflection values.

19. The method of Claim 18, further comprising:

generating a plot of load vs. time for a slide stroke of the press.

20. An apparatus for monitoring a running press, comprising:
a speed sensor for sensing a value of press speed;
input means for inputting a plurality of variables corresponding to characteristics of the press; and

5 storage means for storing an equation which can be used for generating the theoretical slide displacement curve, said equation utilizing said plurality of variables corresponding to characteristics of the press and said value of press speed to generate the theoretical slide displacement curve;

10 a computational device for generating the theoretical slide displacement curve, said computational device communicatively connected to said sensor means, said input means and said storage means; and

15 a non-contact displacement sensor for sensing slide displacement during an actual load condition of the press, said non-contact displacement sensor communicatively connected to said computational device, said computational device plotting sensed slide displacement vs. a count quantity, said computational device determining the contact point on the actual slide
20 displacement curve which corresponds to the slide contacting the stock material, said computational device establishing a start point on the slide downstroke between top dead center and the

contact point, said computational device establishing an end
point on the slide upstroke between top dead center and the
25 contact point, said computational device identifying the points
on the theoretical slide displacement curve corresponding to the
start point and the end point, said computational device
identifying the points on the actual slide displacement curve
corresponding to the start point and the end point, said
30 computational device superimposing the identified start points on
the theoretical and actual slide displacement curves, said
computational device superimposing the identified end points on
the theoretical and actual slide displacement curves so that the
theoretical and actual slide displacement curves can be compared
35 to obtain indicators of press performance.

21. The apparatus as recited in Claim 20, wherein said
computational device comprises:

a microprocessor.

22. The apparatus as recited in Claim 20, wherein said
plurality of variables comprises:

a value of connecting rod length;

a value of stroke length;

5 a value of drive type; and

a value of bearing size.

23. The apparatus as recited in Claim 20, wherein said count
quantity is a measure of time.

24. The apparatus as recited in Claim 20, wherein said count quantity is a measure of crank angle.

25. An apparatus for monitoring the load on a mechanical press, comprising:

a speed sensor for sensing the speed of the press;

a non-contact displacement sensor for sensing slide displacement during an actual load condition of the press;

input means for inputting a plurality of variables corresponding to characteristics of the press; and

a computational device, said computational device communicatively connected to said speed sensor, said non-contact displacement sensor and said input means, said computational device computing a theoretical no load value of slide displacement, said computational device computing a value of dynamic deflection by computing the difference between the theoretical no load value and the corresponding actual load value of slide displacement, said computational device multiplying the value of dynamic deflection by the value of static stiffness of the mechanical press to determine a value of load on the press at a point of the slide stroke.

26. The apparatus as recited in Claim 25, wherein said plurality of variables comprises:

a value of static stiffness corresponding to the press being monitored;

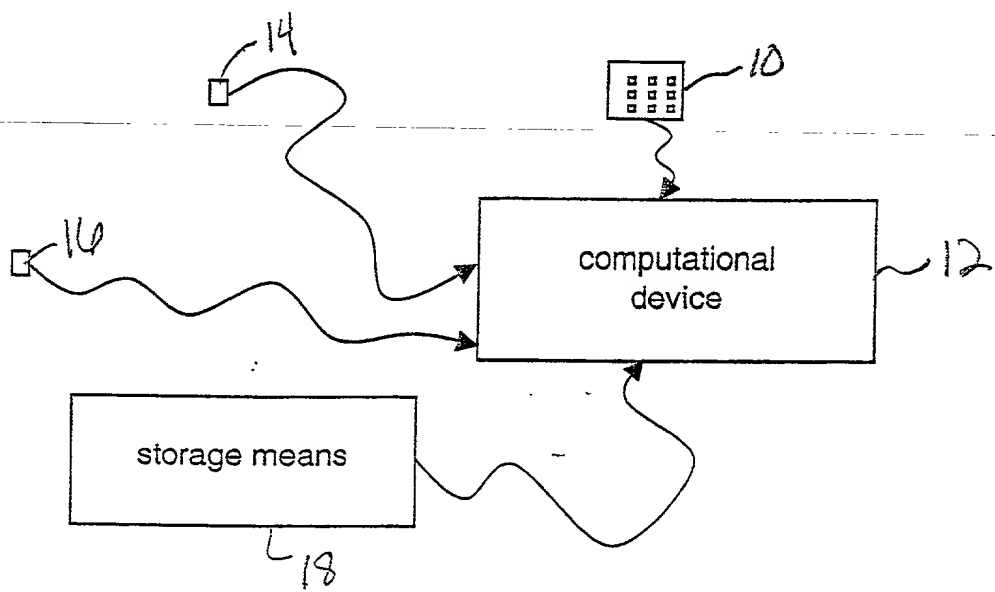
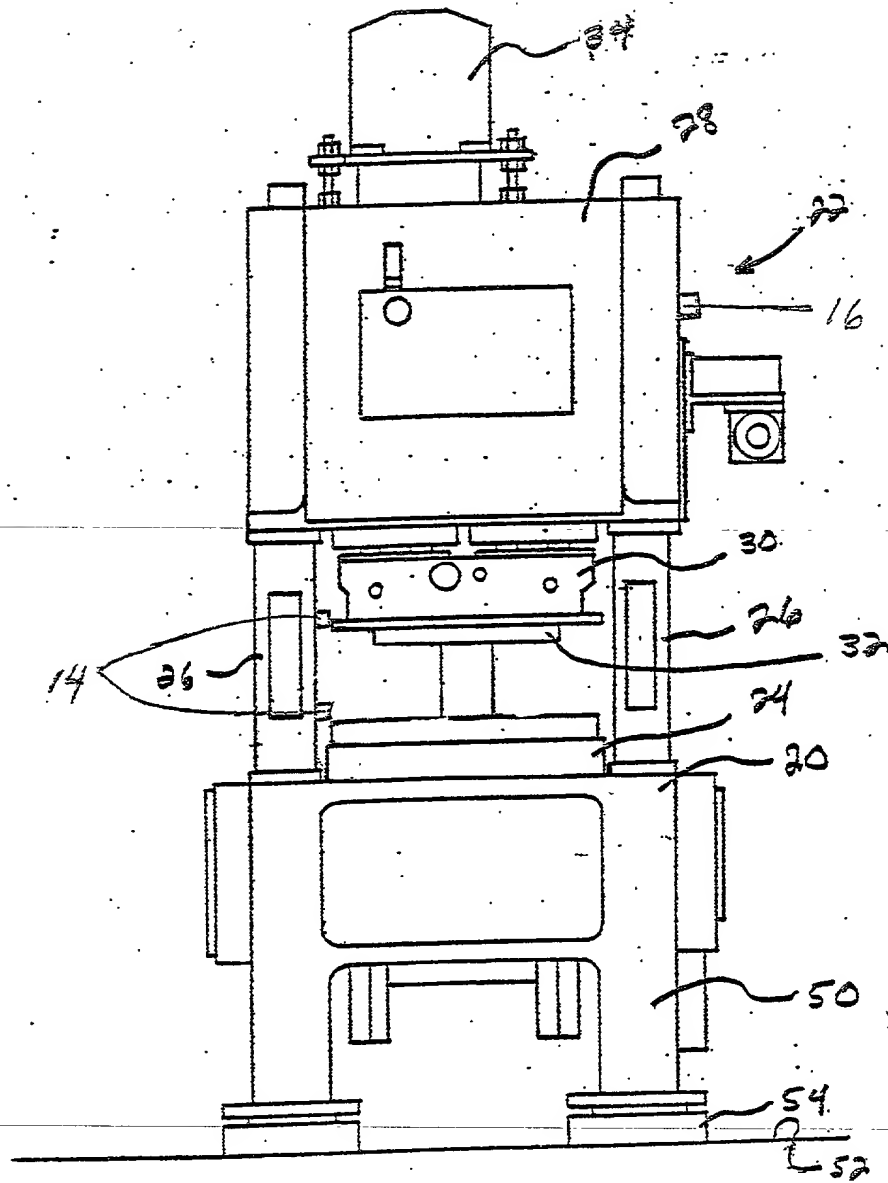


FIGURE 1



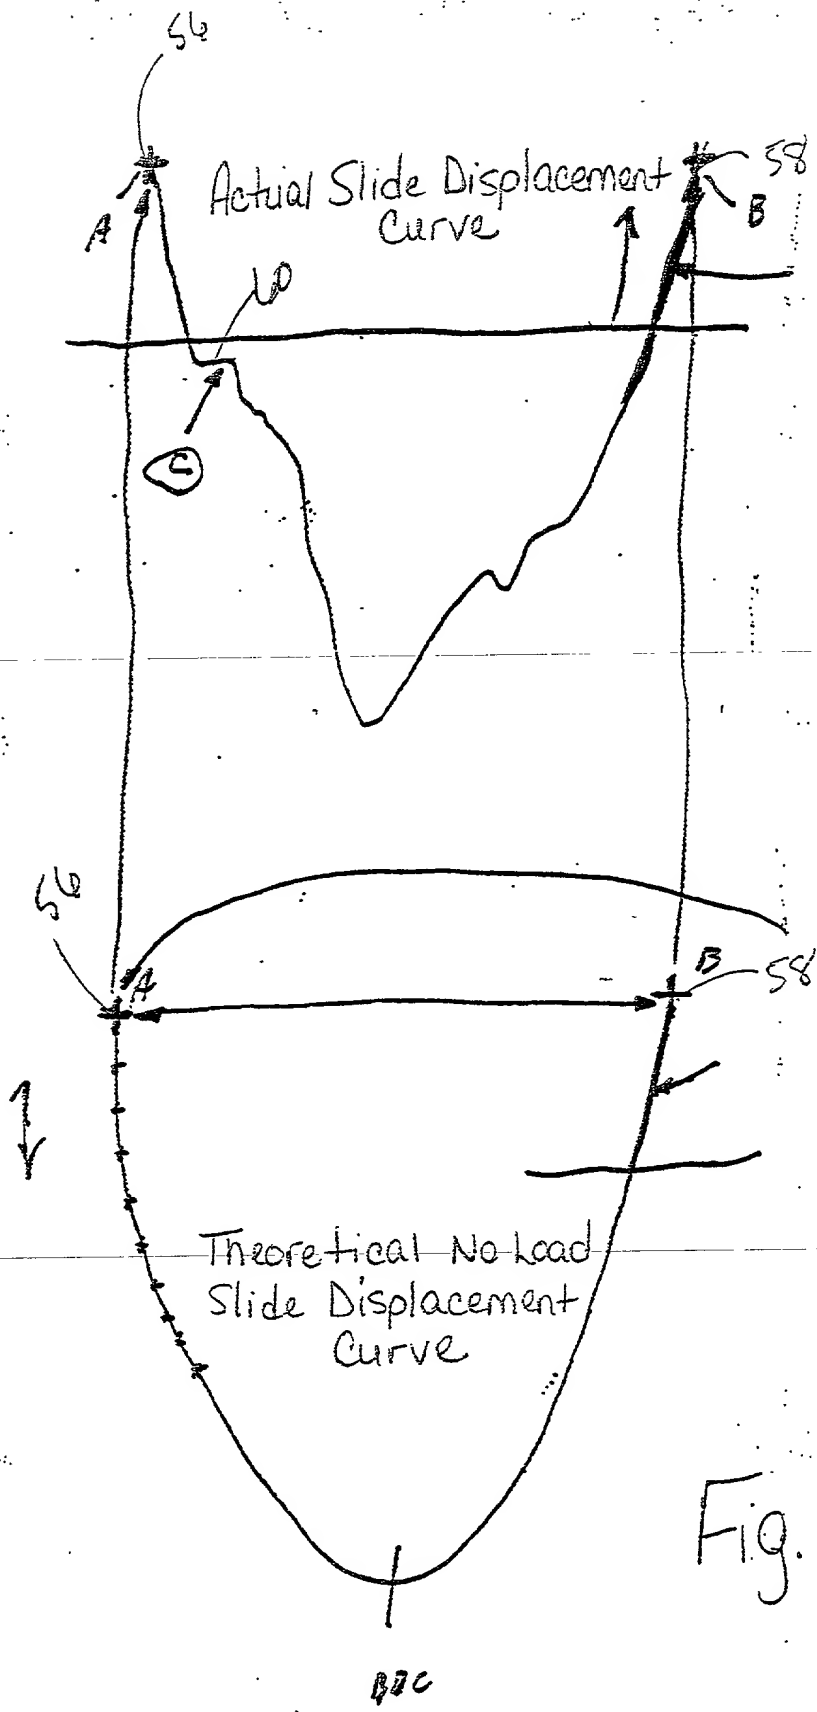


Fig. 4

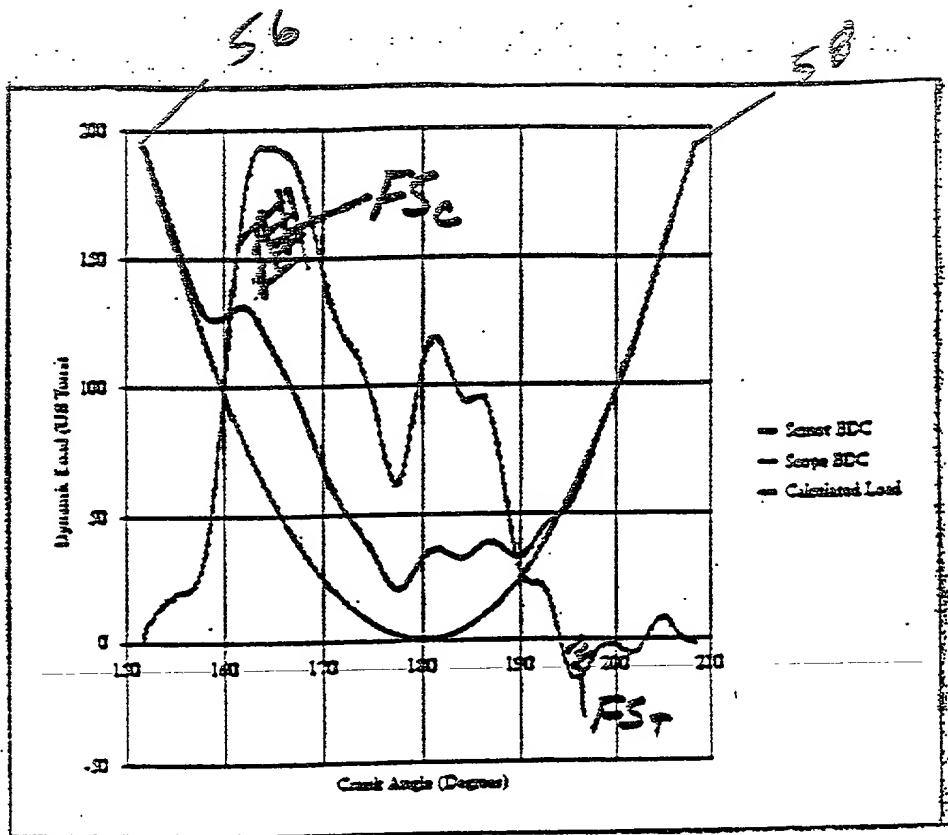


Fig. 5A

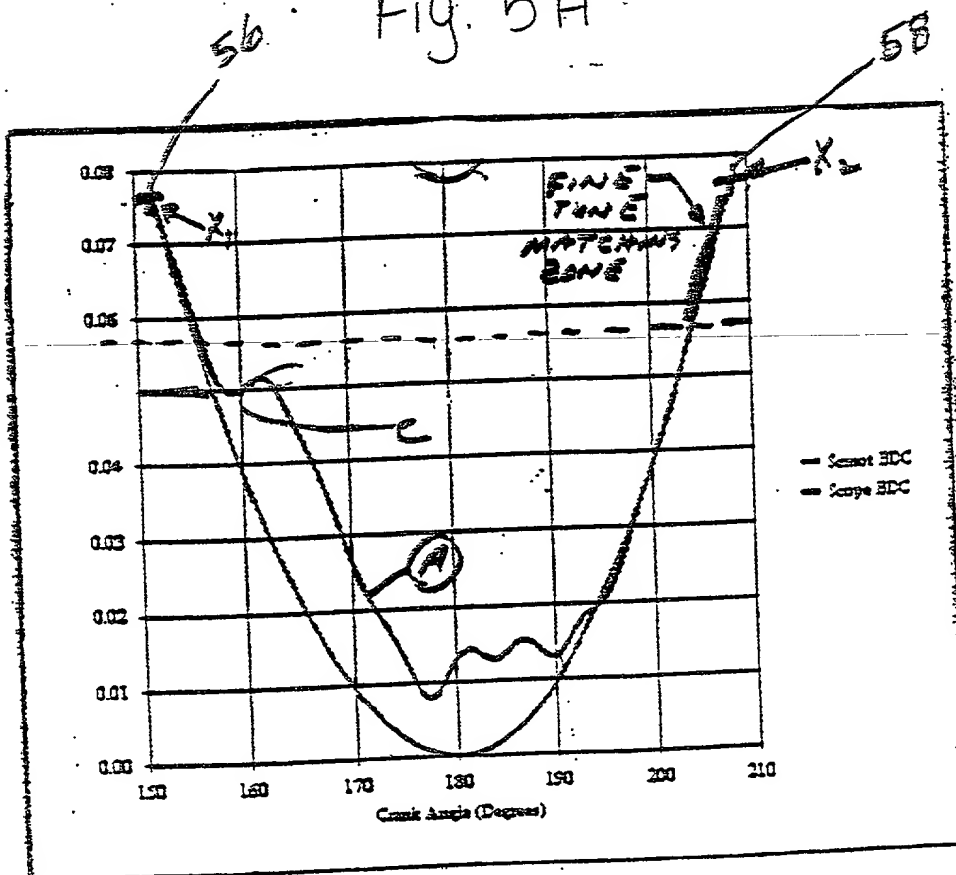


Fig. 5B

ATTORNEY'S DOCKET NO. M-193

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DISPLACEMENT BASED DYNAMIC LOAD MONITOR

the specification of which:

☒ is attached hereto.

☐ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Priority Claimed</u>		<u>PRIOR FOREIGN APPLICATION(S)</u>		
<input type="checkbox"/>	<input type="checkbox"/>	_____	_____	_____
Yes	No	(Number)	(Country)	(Day/Month/Year Filed)

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States application(s) listed below:

<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>60/160,170</u>	<u>October 19, 1999</u>
Yes	No	(Application Serial No.)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Telephone: 219-485-6001
Facsimile: 219-486-2794

Inventor's Signature _____ Date _____

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---